





FICHA TECNICA:
ZZ-HAA01-15M / 24 AWG
ZZ-HAA01-20M / 24 AWG

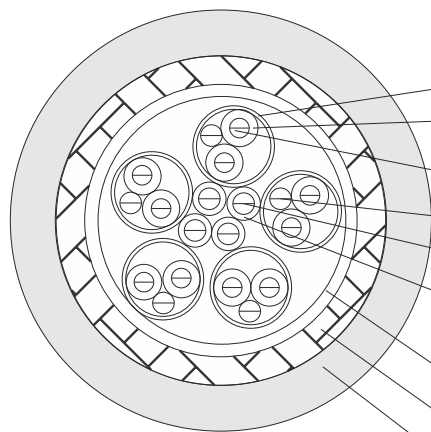

2.0 HDMI CABLE
VERSION HIGH-DEFINITION MULTIMEDIA INTERFACE

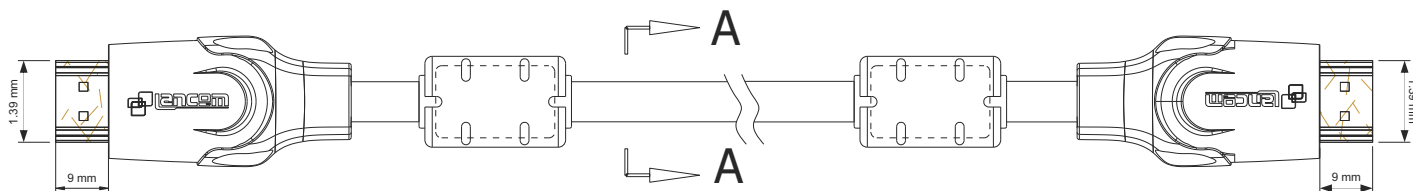

Aluminio+ Mylar: 5*(8+11) AL/MY/MY

Aislamiento: 5 pares, polietileno Espumado (FPE)

Diametro: $\varnothing 1.40 \pm 0.02$

Conductor: 5 Pares x 24 AWG (Diametro: 1/0.51 CUx1par)

Conductor: 5 Cables x 28 AWG (0.32 CU)

Conductor: 4 Cables x 28 AWG (0.32 CU)

Aislamiento: 4 Cables, Diametro: $\varnothing 0.7 \pm 0.03$, Polietileno de alta densidad (HDPE)

Aluminio + Mylar, 0.025*30mm

Costura Trenzada: 16/8/0.12 Aluminio

Cubierta: PVC, Diametro $\varnothing 8.0 \pm 0.15$ mm, Negro

HDMI V2.0	SIGNAL ASSIGNMENT				HDMI V2.0
1 Red					Red 1
2 Earth					Earth 2
3 White					White 3
4 Blue					Blue 4
5 Earth					Earth 5
6 White					White 6
7 Green					Green 7
8 Earth					Earth 8
9 White					White 9
10 Brown					Brown 10
11 Earth					Earth 11
12 White					White 12
14 Orange					Orange 14
17 Earth					Earth 17
19 White					White 19
13	Yellow	CEC	Yellow		13
15	Orange	SCL	Orange		15
16	White	SDA	White		16
18	Red	+5 Volts Power	Red		18
20					20
LONGITUD (MT)		15.0	± 0.15		
LONGITUD (MT)		20.0	± 0.15		

