



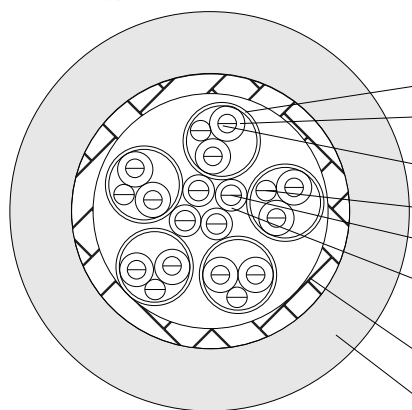

2.0 HDMI CABLE
VERSION HIGH-DEFINITION MULTIMEDIA INTERFACE

FICHA TECNICA:
ZZ-HAA90-1M / 32 AWG
ZZ-HAA90-2M / 32 AWG
ZZ-HAA90-3M / 32 AWG
ZZ-HAA90-5M / 32 AWG
ZZ-HAA90-8M / 32 AWG

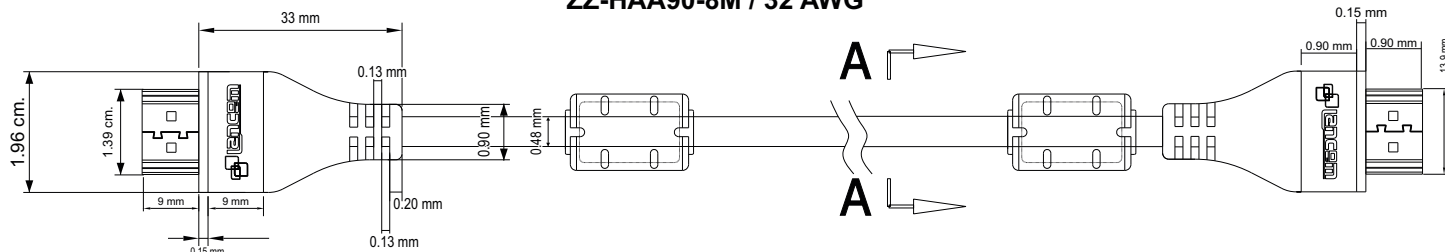

Aluminio + Mylar: 5*(8+11) AL/MY/MY

Aislamiento: 5 pares, polietileno Espumado (FPE)

Diametro: Ø 0.60±0.02

Conductor: 5 Pares x 32 AWG (Diametro: 1/0.20 CUx1par)

Conductor: 5 Cables x 32 AWG (0.20 CU)

Conductor: 4 Cables x 32 AWG (0.20 CU)

Aislamiento: 4 Cables, Diametro: Ø 0.7±0.03, Polietileno de alta densidad (HDPE)

Aluminio + Mylar, 0.025*30mm

Cubierta: PVC, Diametro Ø4.2±0.15mm, Negro

HDMI V2.0	SIGNAL ASSIGNMENT		HDMI V2.0
1 Red			Red 1
2 Earth			Earth 2
3 White			White 3
4 Blue			Blue 4
5 Earth			Earth 5
6 White			White 6
7 Green			Green 7
8 Earth			Earth 8
9 White			White 9
10 Brown			Brown 10
11 Earth			Earth 11
12 White			White 12
14 Orange			Orange 14
17 Earth			Earth 17
19 White			White 19
13	Yellow	CEC	Yellow 13
15	Orange	SCL	Orange 15
16	White	SDA	White 16
18	Red	+5 Volts Power	Red 18
20			White 20
LONGITUD (MT)		1.00 ±0.02	
LONGITUD (MT)		2.00 ±0.02	
LONGITUD (MT)		3.00 ±0.014	
LONGITUD (MT)		5.00 ±0.014	
LONGITUD (MT)		8.00 ±0.014	

