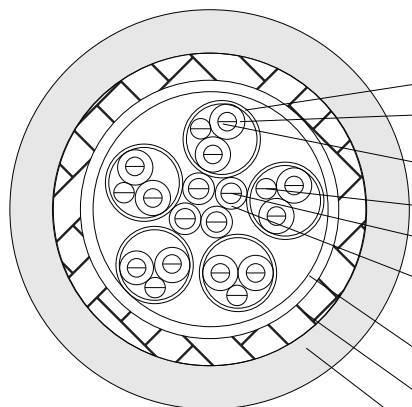
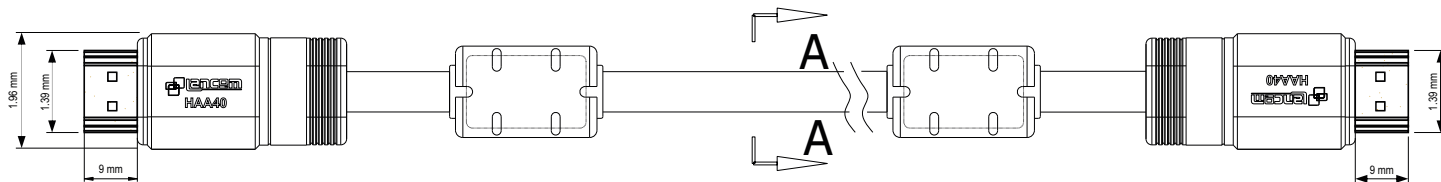




2.0 HDMI CABLE
VERSION HIGH-DEFINITION MULTIMEDIA INTERFACE

FICHA TECNICA:
ZZ-HAA40-15M / 24 AWG
ZZ-HAA40-20M / 24 AWG



Aluminio + Mylar: 5*(8+11) AL/MY/MY

Aislamiento: 5 pares, polietileno Espumado (FPE)

Diametro: $\varnothing 1.40 \pm 0.02$

Conductor: 5 Pares x 24 AWG (Diametro: 1/0.51 CUx1par)

Conductor: 5 Cables x 28 AWG (0.32 CU)






Conductor: 4 Cables x 28 AWG (0.32 CU)

Aislamiento: 4 Cables, Diametro: $\varnothing 0.7 \pm 0.03$, Polietileno de alta densidad (HDPE)

Aluminio + Mylar, 0.025*30mm

Costura Trenzada: 16/8/0.12 Aluminio

Cubierta: PVC, Diametro $\varnothing 8.0 \pm 0.15$ mm, Negro

HDMI V2.0		SIGNAL ASSIGNMENT		HDMI V2.0	
1	Red			Red	1
2	Earth			Earth	2
3	White			White	3
4	Blue			Blue	4
5	Earth			Earth	5
6	White			White	6
7	Green			Green	7
8	Earth			Earth	8
9	White			White	9
10	Brown			Brown	10
11	Earth			Earth	11
12	White			White	12
14	Orange			Orange	14
17	Earth			Earth	17
19	White			White	19
13	Yellow	CEC		Yellow	13
15	Orange	SCL		Orange	15
16	White	SDA		White	16
18	Red	+5 Volts Power		Red	18
20					20
LONGITUD (MT)			15.0 ±0.15		
LONGITUD (MT)			20.0 ±0.15		

